

Clean Air Hose Reel

Series 7000

New Product Option

DESCRIPTION

Our 7000 Series is now available as a safe and efficient respiratory component. It features strength and reliability as with every other 7000 Series, and in addition the fluid path is non-corrosive stainless steel. When properly installed, Reelcraft's 7800 OLB21 clean air reel is designed to reduce the operator's burden of managing long lengths of hose. When the reel is not in use, expensive respiratory hoses are stored up and out of harms way. The reel holds 50' of 3/8" I.D. neoprene hose.

BENEFITS

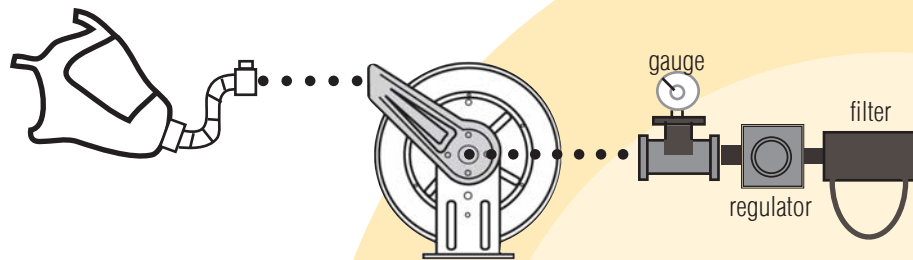
- **Safety** Reel stores hoses up and out of the way when not in use, reducing possibility of slips, trips, and falls.
- **Strength** Base and guide arm are made from heavy gauge steel and robotically welded for superior strength by design.
- **Versatility** Multi-positional guide arm facilitates ceiling, wall or floor mount and adjusts with the removal/repositioning of four bolts.

RELATED PRODUCTS

Reelcraft offers a full line of hose, cord and cable reels manufactured in the united states and sold all over the world. Browse through our selection of over 2,500 different reels at www.reelcraft.com.




APPLICATIONS

- Painting
- Chemical Handling
- Pharmaceutical
- Manufacturing



DIMENSIONS		
7800 OLB21		
	in / mm	
A	20 1/4	514
B	19	483
C	7 7/8	200
D	3 7/8	98
E	7	178

NOTE: Four 1/2" O.D. mounting holes

ACCESSORIES		
180° Mounting Bracket	340° Pivot Base	Hose Bumper
		
600626	600608	1-HR1004-3

SPECIFICATIONS							
MODEL (without hose)	HOSE I.D.		HOSE O.D.		PRESSURE	CAPACITY	WEIGHT
	in / mm	in / mm	in / mm	in / mm	psi / bar	ft	lbs / kg
7800 OLB21	3/8	10	7/8	22	500 35	50	43 20

NOTE: A flexible hose connection must be used between the hose reel inlet and the source of supply to prevent possible misalignment and binding. Recommended neoprene hose should be MSA part # 455022 or equivalent (For MSA information call 1-800-MSA-2222)

NOTE: All prices subject to change, effective January 1, 2005.



SPECIFICATIONS

- ✓ Maximum pressure 500 psi
- ✓ Corrosion resistant baked-on powder coat finish
- ✓ Maximum temperature 210° F (99° C)
- ✓ Stainless steel, full-flow shaft and swivel
- ✓ Standard finish is blue
- ✓ Fluid path is sterilized before assembly

USA: 800-444-3134

Canada: 800-268-1756
Europe: + 44 (0) 1536 406999
Asia: 63-45-599-3721

Reelcraft Industries, Inc.

One Reelcraft Center / P.O. Box 248
Columbia City, IN 46725
FAX: 260-248-2605

www.reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

REELCRAFT
Wind Things Up With Reelcraft

CLEAN AIR HOSE REEL / SERIES 7000